

ZOOK's Skid-Safe System Advantage

- Fully assembled and ready for immediate installation between flanges, substantially reduces installation time and assembly difficulties
- Reverse acting disk has full dome membrane protection from the RAH holder
- Skid-Safe unit can be easily installed using integral flange bolt holes
- Self-centralization of the Skid-Safe unit within the pipework
- Specific integral flange guide holes ensure the Skid-Safe unit cannot be installed into non-compatible flange ratings

The Skid-Safe system is the ultimate pressure relief protection on infrastructures used for the extraction of Coal Seam Gas, Liquid Natural Gas by way of fracking and other industry methods.


The Components

Z-Alert detect device is the most current technology of rupture disk detection. It is situated remote of the disk allowing maintenance and inspection without interfering with the disk assembly.

RA reverse acting disk has full dome membrane protection from the holder.

Available in:

- Low pressure range
- Mid pressure range
- High pressure range

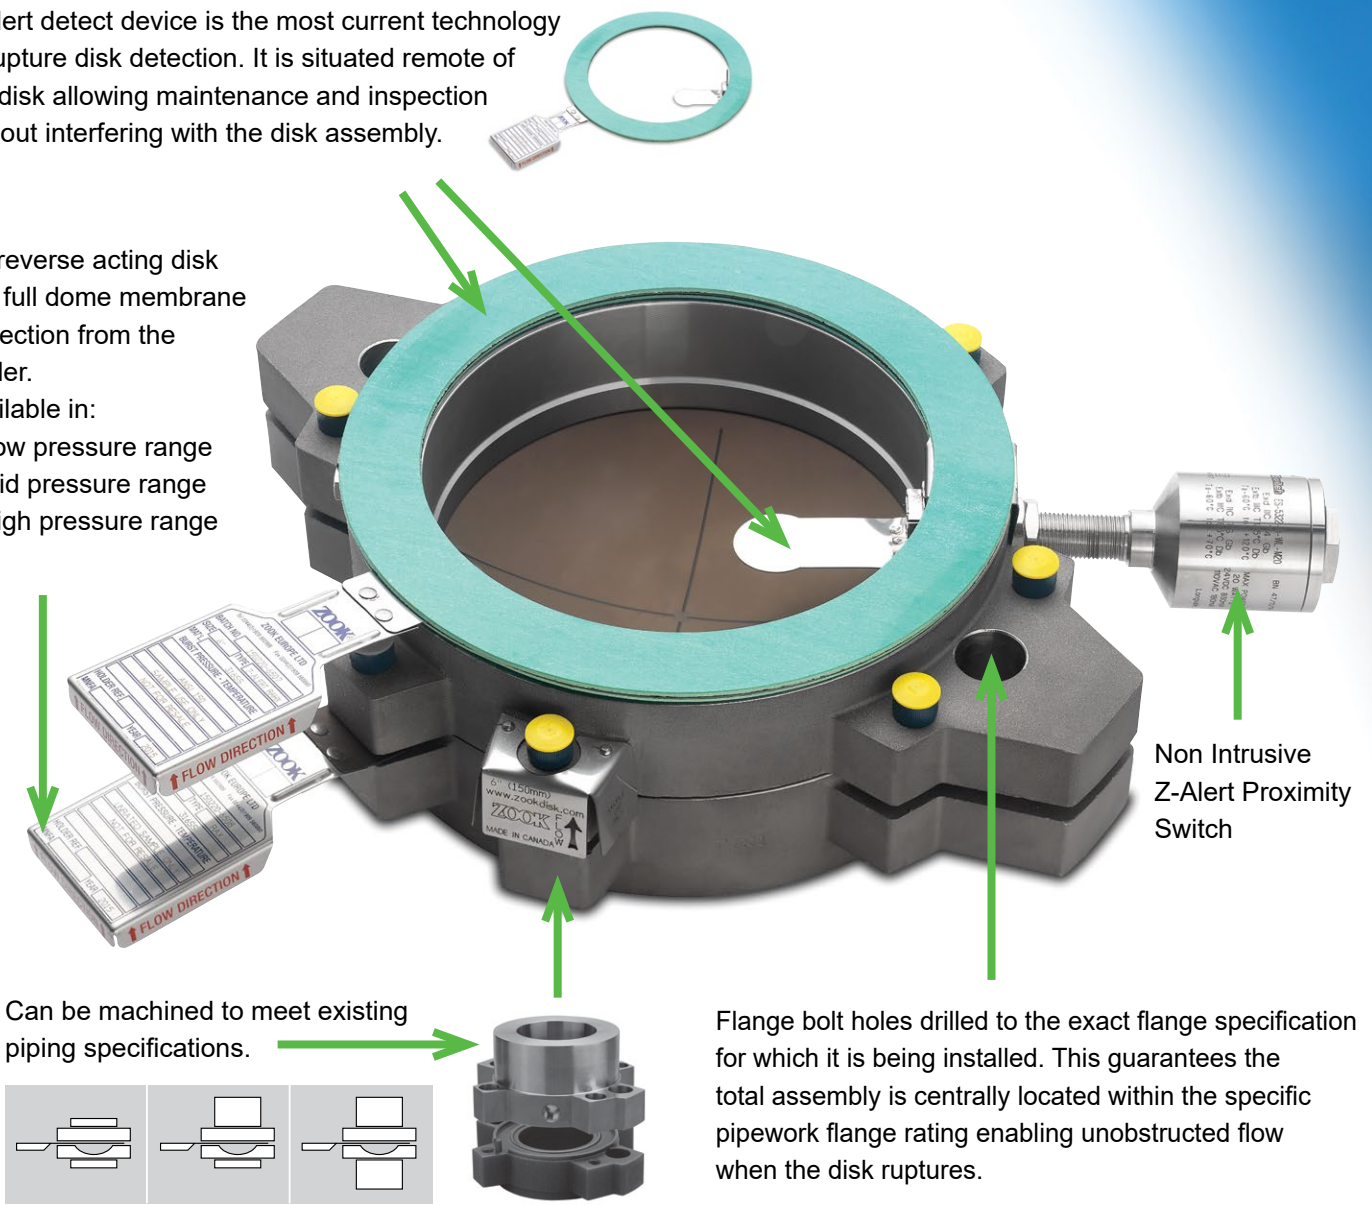

Non Intrusive
Z-Alert Proximity
Switch

Can be machined to meet existing piping specifications.

Flange bolt holes drilled to the exact flange specification for which it is being installed. This guarantees the total assembly is centrally located within the specific pipework flange rating enabling unobstructed flow when the disk ruptures.



SKID-SAFE Components - Ordering

Rupture Disk

RA4



- Low pressure range
- Suitable for both liquid and gas

RA6



- Mid pressure range
- 95% Operating ratio
- Suitable for both liquid and gas

RA8



- Low pressure range
- 95% Operating ratio
- Suitable for both liquid and gas

RAX



- High pressure range
- Scored metal design
- GAS SERVICE ONLY

Various disk materials available. Skid-Safe can also be used with forward acting disks.

Holder

- Various holder dimensions available.
- Holders are available for all major flange standards.
- Skid-Safe holder can be a reverse acting holder or forward acting holder. Please specify when ordering.



Z-Alert

- Z-Alert is installed in all Skid-Safe units.
- Z-Alert (Non-intrusive proximity switch & magnetic sensor) is pre-assembled onto the RAH holder ready for installation directly between pipework flanges.
- Z-Alert is certified to:
ATEX, IECExd, IP66 to 68, UL, TRCU, SIL2




Z-Alert Magnetic Sensor



Z-Alert Proximity Switch

Preassembled & Shipped for Immediate Installation

- ZOOK will fully assemble the Skid-Safe unit to customer's specifications
- Skid-Safe unit arrives in internationally accepted package and can be taken directly from the crate and installed immediately



SKID-SAFE_DATA_092018

Visit us at www.zookdisk.com

SERVING AMERICA, CENTRAL & SOUTH AMERICA

16809 Park Circle Drive
Chagrin Falls, Ohio 44022
United States

Toll Free: +1 800 543 1043

Phone: +1 440 543 1010

Fax: +1 440 543 4930

E-mail: sales@zookdisk.com

SERVING EUROPE, MIDDLE EAST & AFRICA

Navigation House, Bridge St.
Killamarsh, Sheffield, S21 1AL
United Kingdom

Phone: +44 (0) 1909 560999

Fax: +44 (0) 1909 560860

E-mail: sales.europe@zookdisk.com

SERVING CANADA

4400 South Service Road
Burlington, Ontario, L7L 5R8
Canada

Toll Free: +1 800 370 6057

Phone: +1 905 681 2885

Fax: +1 905 681 8838

E-mail: sales.canada@zookdisk.com

SERVING ASIA PACIFIC

Unit No. 23A-05, Menara Landmark
No.12, Jalan Ngee Heng
80000 Johor Bahru, Johor,
Malaysia

Phone: +60 (7) 2910099

Fax: +60 (7) 2910096

E-mail: sales.asia@zookdisk.com



Safety through knowledge and performance.